



# VORTEX DC2 DRYING CABINET

Increase efficiency and preserve the integrity of high-performance flame resistant fabrics with the Vortex DC2 Drying Cabinet. Versatility is at the core of the Vortex DC2, which accommodates turnout gear, boots, gloves and hoods to provide a tailored solution for properly drying personal protective apparel and more. The Vortex DC2 boasts temperature tracking sensors, pre-programmed cycles and a standard 110v connection ensuring simple set up and operation.



## STANDARD FEATURES


- Compact design
- Easy installation
- Delivered pre-assembled
- Fully automatic programs
- Manual programs
- NFPA 1851 compliant
- Retractable hanging system
- Capacity for drying 2 sets of turnout gear or large protective garments
- Temperature tracking system with advanced control sensors
- Overheat protection
- Energy-efficient

## INCLUDED ACCESSORIES


- Hanging rod
- Two Dry Kwik coat hangers
- Three tiers of retractable hanging racks
- Two ventilated shelves
- Door hook rack (13 hooks)
- Two door bars




FRONT

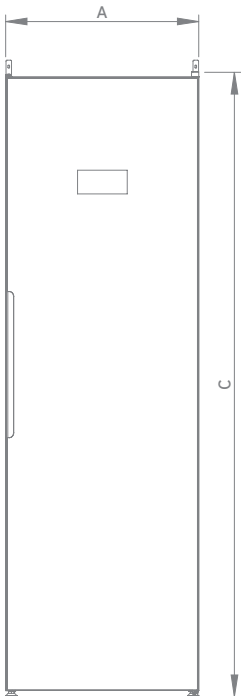

LEFT SIDE

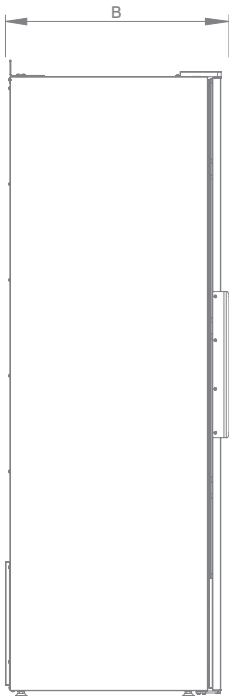

FROM ABOVE



| Vortex DC2 | A    | B   | C    | D   | Weight    |
|------------|------|-----|------|-----|-----------|
| in         | 23.4 | 25  | 73   | 3.9 | 138.9 lbs |
| mm         | 595  | 635 | 1855 | 100 | 63 kg     |

## TECHNICAL SPECIFICATIONS

### VORTEX DC2 DRYING CABINET

|                                  |                                              |                                       |
|----------------------------------|----------------------------------------------|---------------------------------------|
| <b>Machine Type</b>              |                                              | <b>Drying Cabinet</b>                 |
| <b>Product Name</b>              |                                              | <b>Vortex DC2</b>                     |
| Product No.                      |                                              | VDC2                                  |
| Warranty                         |                                              | 3 year limited                        |
| <b>Main Data</b>                 |                                              |                                       |
| Type                             |                                              | Air vented                            |
| Capacity, sets of turnout gear   |                                              | 2                                     |
| Capacity (dry weight)            | lbs / kg                                     | 13.2 / 6                              |
| Interior capacity                | cu ft / L                                    | 18.45 / 522                           |
| Hanging Length                   | in / mm                                      | 60 / 1524                             |
| Dewatering capacity              | oz/min / g/min                               | 0.59 / 17                             |
| Noise emission                   | dB(A)                                        | 60                                    |
| Overheat protection              |                                              | Yes                                   |
| <b>Electrical Installation</b>   |                                              |                                       |
| Supply voltage                   | V                                            | 110-120V, 60Hz                        |
| Total effect                     | kW                                           | 1.3                                   |
| Protection                       | A                                            | 13                                    |
| <b>Dimensions</b>                |                                              |                                       |
| Outer: width × depth × height    | in / mm                                      | 23.4 × 25 × 73 / 595 × 635 × 1855     |
| Inner: width × depth × height    | in / mm                                      | 23.3 × 21.3 × 64.8 / 593 × 542 × 1647 |
| Shipping: width × depth × height |                                              | 28.7 × 29.9 × 86.6 / 730 × 760 × 2200 |
| <b>Weight</b>                    |                                              |                                       |
| Weight                           | lbs / kg                                     | 138.9 / 63                            |
| Shipping weight                  | lbs / kg                                     | 180 / 82                              |
| <b>Ventilation</b>               |                                              |                                       |
| Outlet exhaust                   | Ø in / mm                                    | 3.93/ 100                             |
| Outlet air flow                  | cfm / m <sup>3</sup> /h                      | 55.9 / 95                             |
| Fan capacity                     | ft <sup>3</sup> /hour / m <sup>3</sup> /hour | 6356 / 180                            |

